


GLM-7600NX

| Model Nr. | GLM-7600NX |
|---|------------|
| Optical power (mW) | 6 W |
| Center wavelength (nm) | 520 nm |
| Center wavelength tolerance (nm) | ± 5 |
| Beam size (FWHM, mm) (horizontal*vertical) | 6 x 5.5 |
| Beam divergence (half angle, horizontal/vertical, mrad) | 0.5 / 0.3 |
| Linear polarization | N |
| M ² (horizontal/vertical) | 12 / 5 |
| Modulation freq.(kHz) | 100 |
| TEC circuit peak power consumption | 24 V / 8 A |
| Diode circuit peak power consumption | 24 V / 6 A |
| Dimensions (LxWxH,mm) | 174x107x51 |
| Driver dimensions (LxWxH,mm) | 117x89x34 |

Laser head

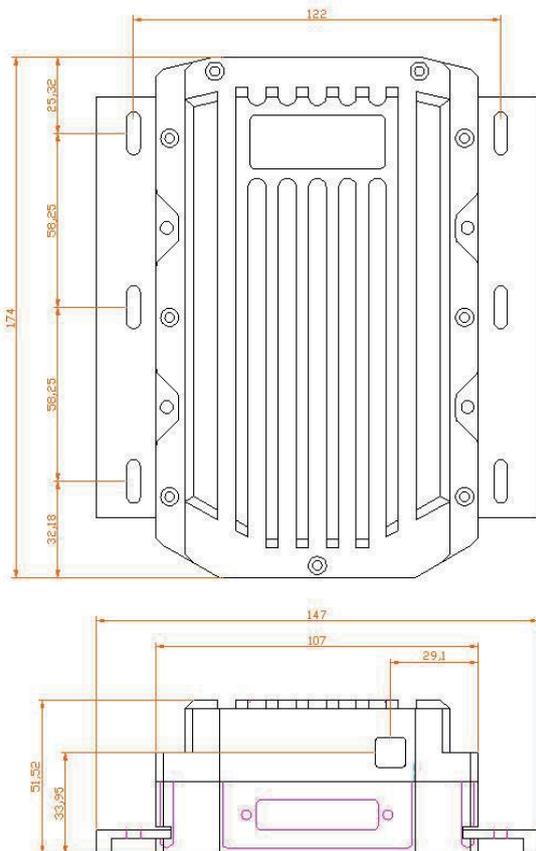

OEM driver

