



# YUCCA 30-343

High power short nanosecond UV laser for high-speed precision micromachining

YUCCA, the UV fiber laser, provides high power at high pulse repetition rates with short nanosecond pulses. It is fully designed to improve laser process quality with shorter pulse widths and increase productivity with higher pulse repetition rates.

Its innovative patented fiber design enables a unique combination of short nanosecond pulses, performance for high-speed process and reduced overall processing cost. With a constant short nanosecond pulse duration and beam quality over the whole pulse repetition rate range, YUCCA is the right laser source for the next generation of UV laser micromachining equipment targeting higher throughput.

YUCCA is designed with high-end methodologies to exceed industrial quality standards and to guarantee reliability and serviceability. Manufactured with field proven technology and qualified components, good practices and high-quality, YUCCA is the right answer for 24/7 operation in extended production cycle environments.

<b>Wavelength</b>	<b>343 nm</b>
<b>Power (*)</b> (* ) 10 ns pulse duration	30 W at 100 kHz 15 W at 300 kHz
<b>Pulse Duration (**)</b> (**) Factory set	2 ns, 5 ns, 10 ns or burst mode
<b>Beam quality</b>	$M^2 < 1.2$



## Advantages

- ✓ High power 30 W up to 400 kHz
- ✓ Short pulses 2 ns up to 800 kHz
- ✓ Excellent beam quality  $M^2 < 1.2$  up to 800 kHz
- ✓ High peak power up to 40 kW
- ✓ Field proven technology
- ✓ Long UV crystal lifetime
- ✓ HALT designed / HASS Certified
- ✓ 2 ns, 5 ns, 10 ns or burst
- ✓ True Pulse-On-Demand
- ✓ Instant Pulse Switching

## Applications


- ✓ PCB via drilling, cutting and depaneling
- ✓ ITO patterning
- ✓ Wafer scribing and debonding
- ✓ Glass processing
- ✓ CFRP processing
- ✓ Battery processing
- ✓ Ceramic scribing, cutting and drilling




# YUCCA 30-343

# Typical performances


Power vs pulse duration

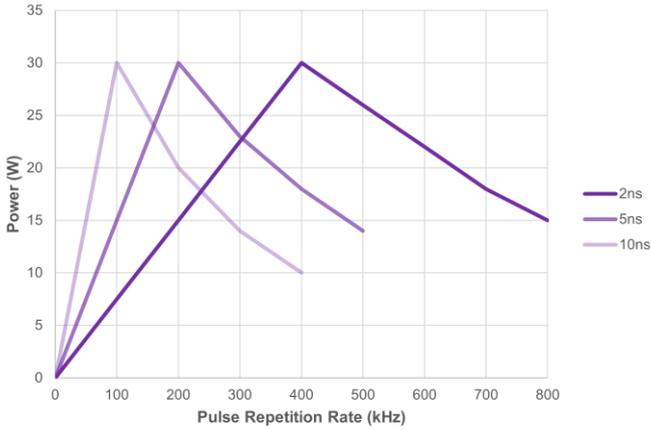


Energy vs pulse duration

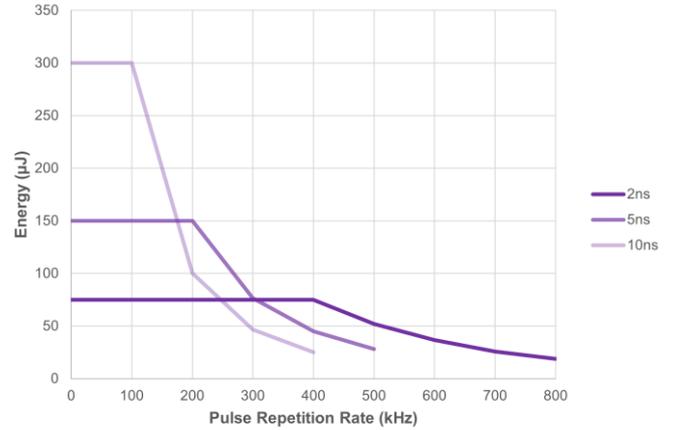


$M^2$

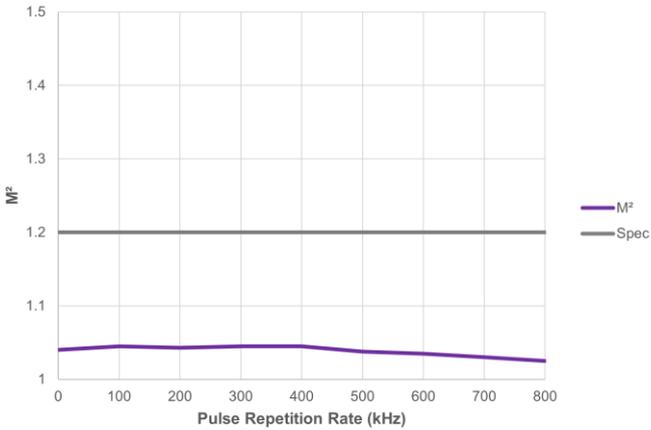


Astigmatism & asymmetry

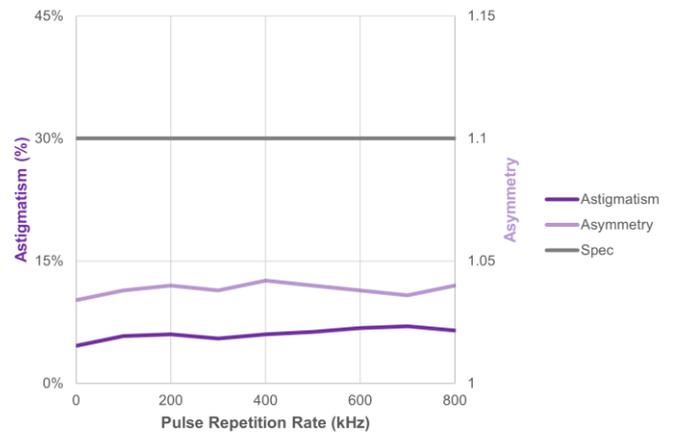


Pulse Energy Stability

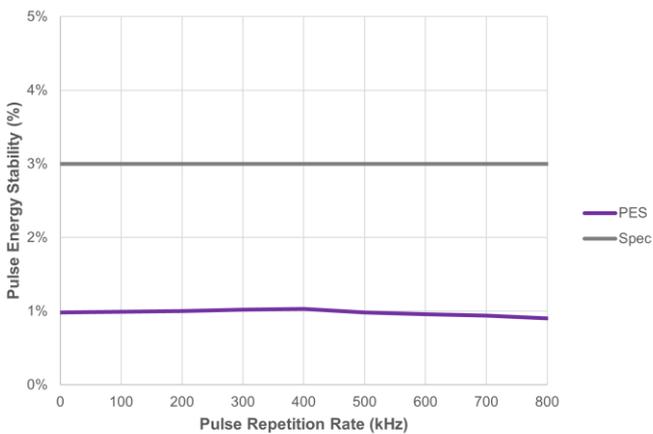


Factory Set Pulses

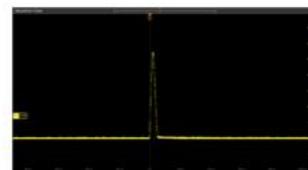

2 ns

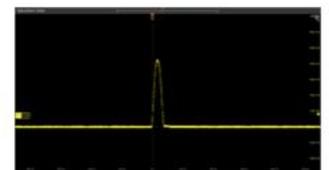

5 ns

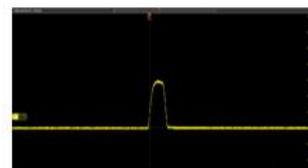

10 ns



4 x 2 ns ;  $\Delta = 10 \text{ ns}$



# YUCCA 30-343

# Specifications

## Output Characteristics

Central Wavelength	343.3 nm ± 0.3 nm			
Average Power (*) (**)	2 ns	5 ns	10 ns	Burst
(*) Pulse duration to be chosen by customer between 2 ns and 10 ns and factory set	30 W @ 400 kHz	30 W @ 200 kHz	30 W @ 100 kHz	(**)
(**) Burst available on request	20 W @ 600 kHz	18 W @ 400 kHz	20 W @ 200 kHz	
	15 W @ 800 kHz	14 W @ 500 kHz	15 W @ 300 kHz	
Pulse Width	Fully programmable from 2 ns to 10 ns			
Pulse Repetition Rates	Single-shot to 800 kHz			
Power Stability	< 2%, 2σ over 8 hours			
Pulse to Pulse Energy Stability	< 3% RMS			

## Beam Characteristics

Spatial Mode	TEM <sub>00</sub>
M <sup>2</sup>	≤ 1.2
Polarization Ratio	≥ 100:1 linear
Polarization Direction	Vertical, ± 2°
Beam Divergence (full-angle)	< 0.2 mrad
4σ Beam Diameter @ exit (nominal)	3.5 mm ± 0.35 mm
Astigmatism	≤ 30%
Beam Circularity	≥ 90%
Long Term Beam Pointing Stability, over 8 hours	≤ 25 μrad, full-angle
Laser safety class (IEC 60825-1 : 2014)	Class IV

## Operating Conditions

External Communications	Ethernet / RS-232 / USB
Warm-up Time	
Cold Start	≤ 30 minutes
Warm Start	≤ 2 minutes
Electrical Requirements	100 – 240 V AC
Line Frequency	50 to 60 Hz
Power Consumption	< 700 W
Temperature Range	15°C to 35°C (59°F to 95°F)
Humidity	10% to 95% RH, non-condensing
Storage Conditions	
Temperature	0°C to 50°C (32°F to 122°F)
Humidity	5% to 95% RH
Altitude (non-operational)	Sea level to 11 000 meters

## Chiller Requirements

Cooling Water Temperature	25°C ± 0.1°C
Minimum Cooling Power	500 W
Cooling Water Flow	5 L/min, 3.5 L/min minimum

## Physical Characteristics

Dimensions (L x W x H)	Laser Head : 1146 x 250 x 169 mm (45.11 x 9.84 x 6.65 in) Control Unit : 506 x 483 x 177 mm (19.92 x 19.01 x 6.97 in)
Weight	Laser Head : 50 kg (110 lbs) without water Control Unit : 25 kg (55 lbs)

## Features


Extended Internal Power Monitoring	Power monitored at each stage of the laser
Ultra Wide Operation Range	Constant pulse width and beam parameters over the whole pulse repetition rate range
Industry Ready Data Logging	Long-term and short-term laser operation log, diagnosis, maintenance
Alignment Beam	Low power mode for laser installation and alignment
Sacrificial Window	Field Replaceable Unit
Advanced Support	Industry 4.0 ready, remote control, remote support, >50 sensors
Best Practices	Sealed laser head, multi-stage components cleaning and assembled in ISO 6 cleanroom (class 1000)




# YUCCA 30-343

# Drawings

## Laser Head (in mm)

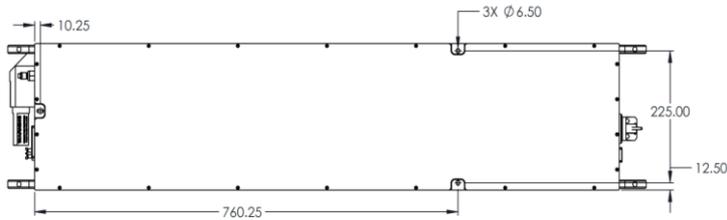


Bottom View




Rear View



Top View




Front View

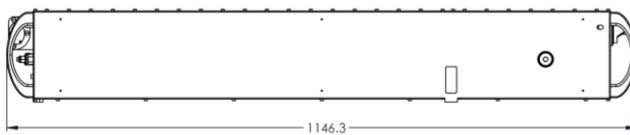


Side View

1146.3


## Power Supply (in mm)

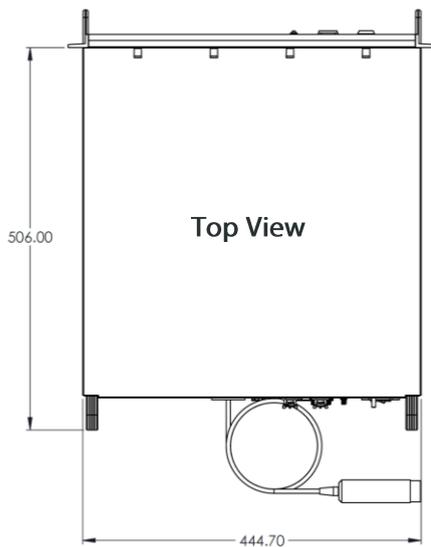

Top View

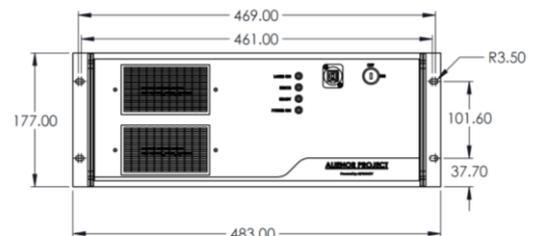

Front View

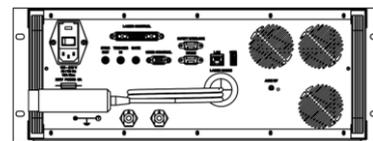

Rear View

According to BLOOM continuous product improvements, specifications and drawings are subject to change without notice.