



YUCCA 80-515

High power short nanosecond visible laser for high-speed precision micromachining

YUCCA, the visible fiber laser, provides high power at high pulse repetition rates with short nanosecond pulses. It is fully designed to improve laser process quality with shorter pulse widths and increase productivity with higher pulse repetition rates.

Its innovative patented fiber design enables a unique combination of short nanosecond pulses, performance for high-speed process and reduced overall processing cost. With a constant short nanosecond pulse duration and beam quality over the whole pulse repetition rate range, YUCCA is the right laser source for the next generation of visible laser micromachining equipment targeting higher throughput.

YUCCA is designed with high-end methodologies to exceed industrial quality standards and to guarantee reliability and serviceability. Manufactured with field proven technology and qualified components, good practices and high-quality, YUCCA is the right answer for 24/7 operation in extended production cycle environments.

Wavelength	515 nm
Power (*) (*) 10 ns pulse duration	80 W up to 300 kHz 40 W @ 600 kHz
Pulse Duration (**) (**) Factory set	2 ns, 5 ns, 10 ns or burst mode
Beam quality	$M^2 < 1.2$



Advantages

- ✓ High power 80 W up to 600 kHz
- ✓ Short pulses 2 ns up to 1 MHz
- ✓ Excellent beam quality $M^2 < 1.2$ up to 1 MHz
- ✓ High peak power up to 60 kW
- ✓ Field proven technology
- ✓ HALT designed / HASS Certified
- ✓ 2 ns, 5 ns, 10 ns or burst
- ✓ True Pulse-On-Demand
- ✓ Instant Pulse Switching

Applications


- ✓ Solar Cells processing
- ✓ Glass processing
- ✓ PERC processing
- ✓ Selective ablation
- ✓ Battery processing
- ✓ Ceramic scribing, cutting and drilling
- ✓ Material processing




YUCCA 80-515

Typical performances


Power vs pulse duration

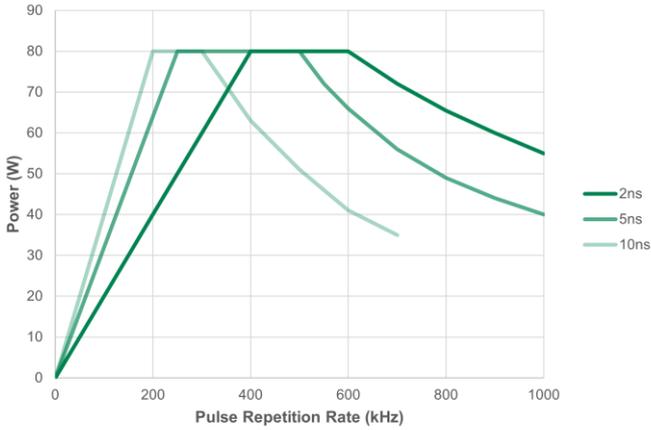


Energy vs pulse duration

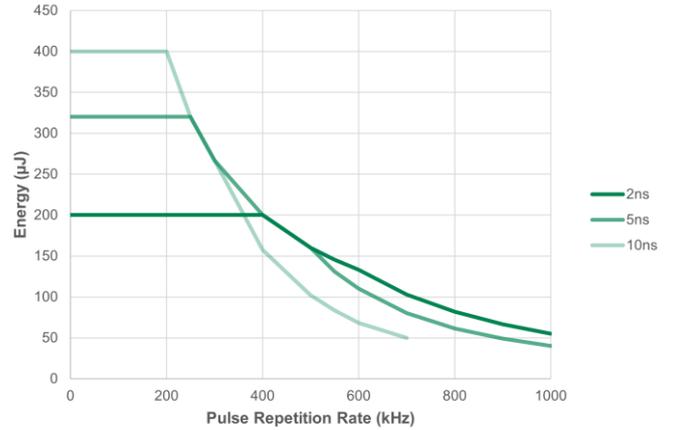


M^2

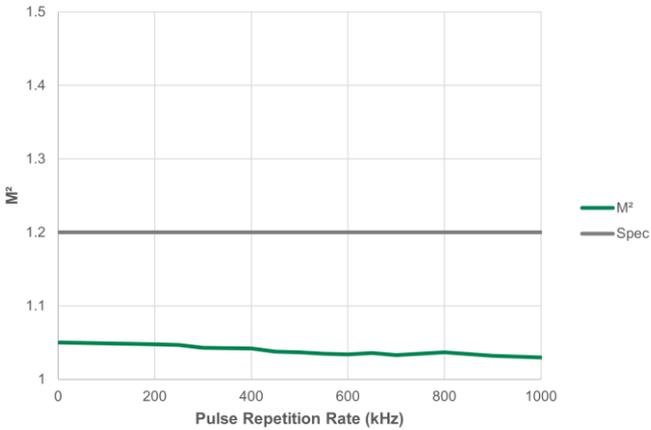


Astigmatism & asymmetry

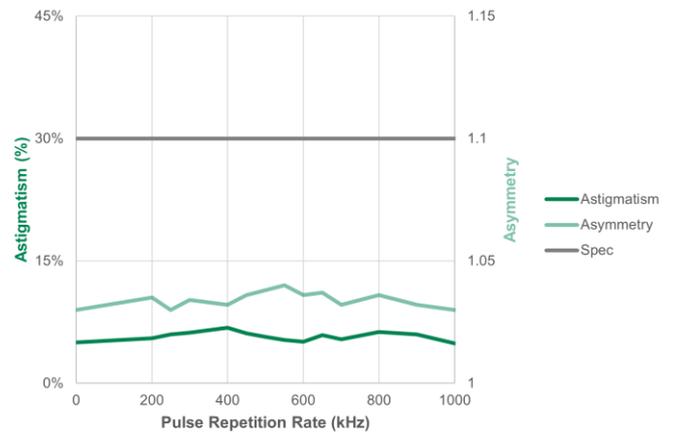


Pulse Energy Stability

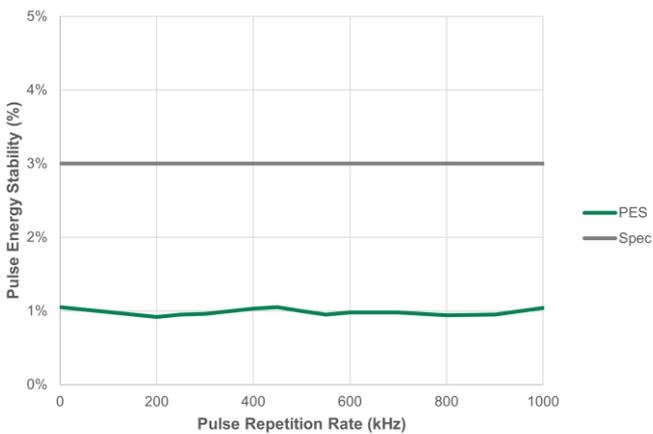


Factory Set Pulses



2 ns

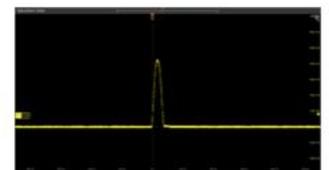

5 ns



10 ns



4 x 2 ns ; Δ = 10 ns



YUCCA 80-515

Specifications

Output Characteristics

Central Wavelength	515 nm ± 0.5 nm			
Average Power (*) (**)	2 ns	5 ns	10 ns	Burst
(*) Pulse duration to be chosen by customer between 2 ns and 10 ns and factory set	80 W @ 400 kHz	80 W @ 250 kHz	80 W @ 200 kHz	
(**) Burst available on request	80 W @ 600 kHz	80 W @ 500 kHz	80 W @ 300 kHz	(**)
	50 W @ 1 MHz	40 W @ 1 MHz	40 W @ 600 kHz	
Pulse Width	Fully programmable from 2 ns to 10 ns			
Pulse Repetition Rates	Single-shot to 1 MHz			
Power Stability	< 2%, 2σ over 8 hours			
Pulse to Pulse Energy Stability	< 3% RMS			

Beam Characteristics

Spatial Mode	TEM ₀₀
M ²	≤ 1.2
Polarization Ratio	≥ 100:1 linear
Polarization Direction	Vertical, ± 2°
Beam Divergence (full-angle)	< 0.3 mrad
4σ Beam Diameter @ exit (nominal)	3.5 mm ± 0.35 mm
Astigmatism	≤ 30%
Beam Circularity	≥ 90%
Long Term Beam Pointing Stability, over 8 hours	≤ 25 μrad, full-angle
Laser safety class (IEC 60825-1 : 2014)	Class IV

Operating Conditions

External Communications	Ethernet / RS-232 / USB
Warm-up Time	
Cold Start	≤ 30 minutes
Warm Start	≤ 2 minutes
Electrical Requirements	100 – 240 V AC
Line Frequency	50 to 60 Hz
Power Consumption	< 900 W
Temperature Range	15°C to 35°C (59°F to 95°F)
Humidity	10% to 95% RH, non-condensing
Storage Conditions	
Temperature	0°C to 50°C (32°F to 122°F)
Humidity	5% to 95% RH
Altitude (non-operational)	Sea level to 11 000 meters

Chiller Requirements

Cooling Water Temperature	25°C ± 0.1°C
Minimum Cooling Power	700 W
Cooling Water Flow	5 L/min, 3.5 L/min minimum

Physical Characteristics

Dimensions (L x W x H)	Laser Head : 1146 x 250 x 169 mm (45.11 x 9.84 x 6.65 in) Control Unit : 506 x 483 x 177 mm (19.92 x 19.01 x 6.97 in)
Weight	Laser Head : 50 kg (110 lbs) without water Control Unit : 25 kg (55 lbs)

Features


Extended Internal Power Monitoring	Power monitored at each stage of the laser
Ultra Wide Operation Range	Constant pulse width and beam parameters over the whole pulse repetition rate range
Industry Ready Data Logging	Long-term and short-term laser operation log, diagnosis, maintenance
Alignment Beam	Low power mode for laser installation and alignment
Sacrificial Window	Field Replaceable Unit
Advanced Support	Industry 4.0 ready, remote control, remote support, >50 sensors
Best Practices	Sealed laser head, multi-stage components cleaning and assembled in ISO 6 cleanroom (class 1000)




YUCCA 80-515

Drawings

Laser Head (in mm)

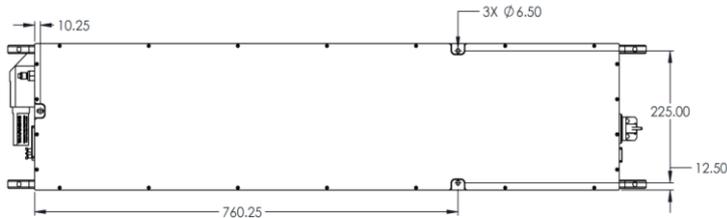


Bottom View




Rear View



Top View




Front View

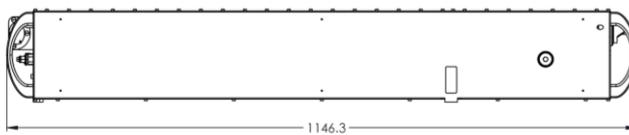


Side View

1146.3


Power Supply (in mm)

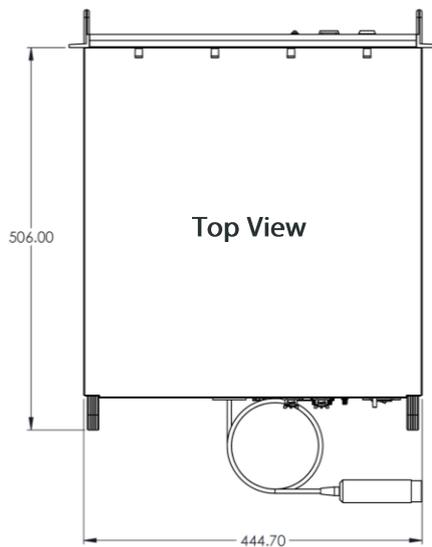

Top View

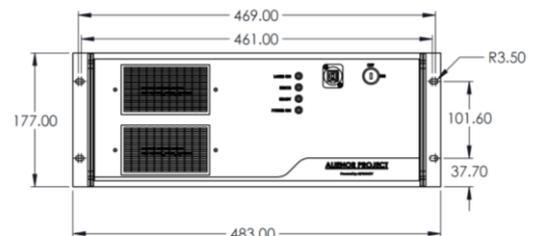

Front View

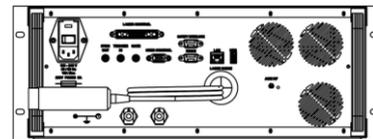

Rear View

According to BLOOM continuous product improvements, specifications and drawings are subject to change without notice.