


BLM-12kBX

Model Nr.	BLM-12kBX
Optical power (mW)	9.5 W
Center wavelength (nm)	445-450
Center wavelength tolerance (nm)	± 5
Beam size (FWHM, mm) (horizontal*vertical)	6 x 6
Beam divergence (half angle, horizontal/vertical, mrad)	0.8 / 0.4
Linear polarization	N
M ² (horizontal/vertical)	17 / 8
Modulation freq.(kHz)	100
Power consumption (W)	< 300
Input voltage (V)	24
Dimensions (LxWxH,mm)	174x107x51
Driver dimensions (LxWxH,mm)	117x89x34

Laser head

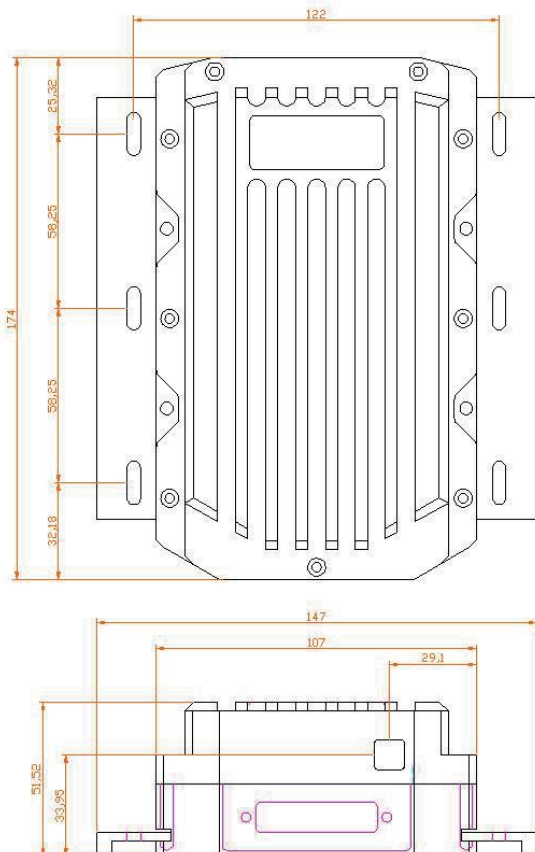

OEM driver

