



### BLM-24kBX

Model Nr.	BLM-24kBX
Optical power (mW)	19 W
Center wavelength (nm)	445-450
Center wavelength tolerance (nm)	± 5
Beam size (FWHM, mm) (horizontal*vertical)	11 x 10
Beam divergence (half angle, horizontal/vertical, mrad)	0.7 / 0.3
Linear polarization	N
M <sup>2</sup> (horizontal/vertical)	35 / 11
Modulation freq.(kHz)	100
Power consumption (W)	< 700
Input voltage (V)	24
Dimensions (LxWxH,mm)	248 x 141 x 66
Driver dimensions (LxWxH,mm)	117x89x34

Laser head

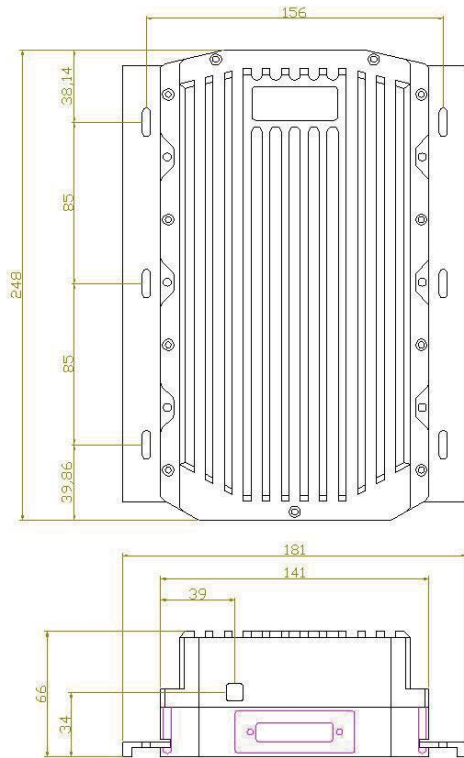

External OEM driver

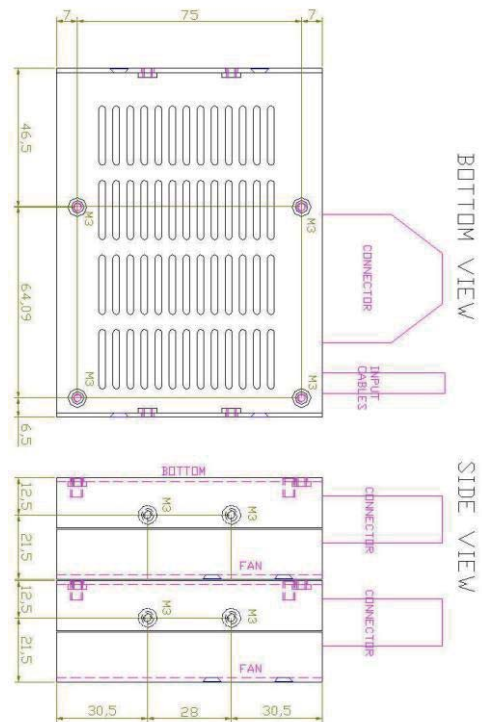

**PNEUM Co., Ltd.**

5-15-3 Minamikoshigaya, Koshigaya-shi,  
Saitama-ken, 343-0845, Japan

TEL: 81-48-985-2720  
FAX: 81-48-985-2721  
info@pneum.co.jp 1508