



LU1470T015 Industrial Laser Diode Up to 1.5W Operating Power



Description:

The LU1470T015 series offers an optical power of 1.5W at 1470nm from a 105µm core, NA 0.15 multi-mode fiber. At this common wavelength our Laser Diode offers a very competitive price-performance value for applications in materials processing, illumination and medicine.

Features & Functions:

- Burn-in tested single emitter
- Hermetically sealed
- 105µm MM Fiber, NA 0.15
- Wavelength 1470nm
- Floating anode / cathode
- Direct modulation up to 100 MHz


Benefits:

- Ultra long lifetime
- Cost-effective
- Robust
- RoHS compliant

Applications:

- Materials processing
- Illumination
- Pumping
- Medical treatment

Modul Drawing (dimensions in mm)

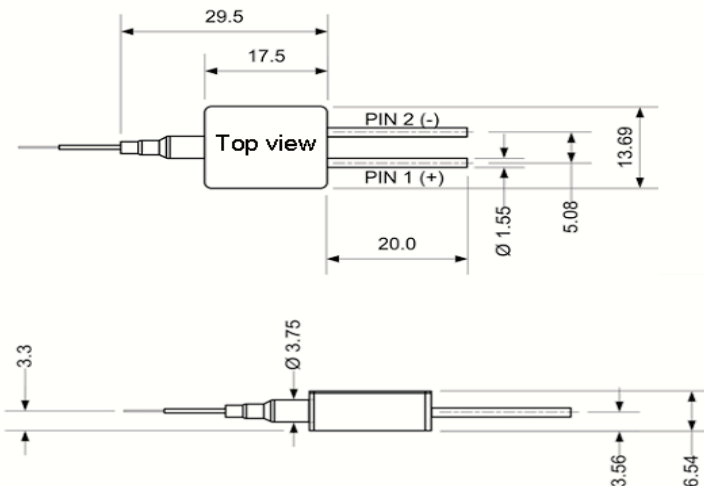

Pin Connections

Pin	Function	Pin	Function
1	LD Anode (+)	2	LD Cathode (-)

Your ideas are welcome.

Electrical and Optical Characteristics Typical laser specifications at 25°C

Parameter	Symbol	Typical	Unit
Output Power c.w.	P_{op} (c.w.)	1.5	W
Peak Wavelength at P_{op}	λ_{peak}	1470+/-20	nm
Spectral Width (fwhm)	$d\lambda$	11	nm
Threshold Current	I_{th}	850	mA
Operating Current	I_{op}	7.0	A
Operating Voltage	V_{op}	1.4	V
Connector Type (optional)		bare fiber (*SMA, FC/APC, FC/PC connector)	
Heat Resistance LD to bottom of base plate	R_{H}	3.5	K / W
Power Conversion Efficiency		20	%
Recommended Case Temperature		20 - 30	°C
Wavelength Shift vs. Temperature		0.4	nm / K
Wavelength Shift vs. Power		1.1	nm / W

Fiber Specifications

Fiber Core Diameter		105	μ m
Fiber Numerical Aperture	NA	0.15	
Fiber Cladding Diameter		125	μ m
Fiber Buffer Diameter		250	μ m
Min. Fiber Length		1	m
Min. Bend Radius		50	mm

Application Note:

- (1) For pulsed operation max peak power can be $1.5 \times P_{op}$ if pulse time is $< 5 \mu$ sec and average power is lower than P_{op} (c.w.)
- (2) Keep the heat sink at $\leq 30^\circ$
- (3) We recommend a standard heatsink with thermal resistance of < 0.5 K/W using forced air flow cooling. Use thermal interface material rated for a thermal contact resistance of less than 1.3 cm²K/W
- (4) Please note, that the 1470nm diodes are highly sensitive to ESD. ESD precautions must be followed very carefully
- (5) A bending radius of 30mm is guaranteed. Please take into account a possible output power reduction of up to 5% at this bending radius.



Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T_{max}	-40	85	°C
Operating Case Temp.	$T_{op, case temp.}$	15	40	°C
Maximum Processing Temp.-max 10sec.	$T_{op, Processing}$		250	°C
LD Forward Current c.w.	$I_{op, max}$		10	A
LD Reverse Voltage	$V_{R, max}$		2	V
Rel. Humidity		5	85	%

Note:

Absolute Maximum Ratings may be applied to the laser module for short periods of time only. Exposure to maximum ratings for extended periods of time or exposure above one or more maximum ratings may cause damage or affect the reliability of the device.

User Safety



Your ideas are welcome.