



LuOcean Mini 4

LU0915D350 Diode Laser with up to 35 W at 915nm



Description:

The Lumics LuOcean Mini 4 diode laser series offers OEM integrators an excellent product to manufacture state-of-the-art end-user laser systems.

The easy integration and safe use of these laser components in combination with several accessories and features give the chance to be cost-efficient in development and manufacturing.

Features & Functions:

- Wavelength 915 nm
- 400 μ m NA 0.22 fiber
- Emitter electrically in series
- Temperature sensor

Options:

- Exchangeable window
- Red or green pilot
- Fiber & Power monitor
- OEM LD driver & cooler
- Controllable pilot intensity


Benefits:

- Single emitter long lifetime
- Passive cooling
- Sealed housing
- Small foot print
- SMA connector

Applications:

- Heating
- Dental
- Dermatology
- Veterinary
- Pumping

Module Drawing (Dimensions in mm)

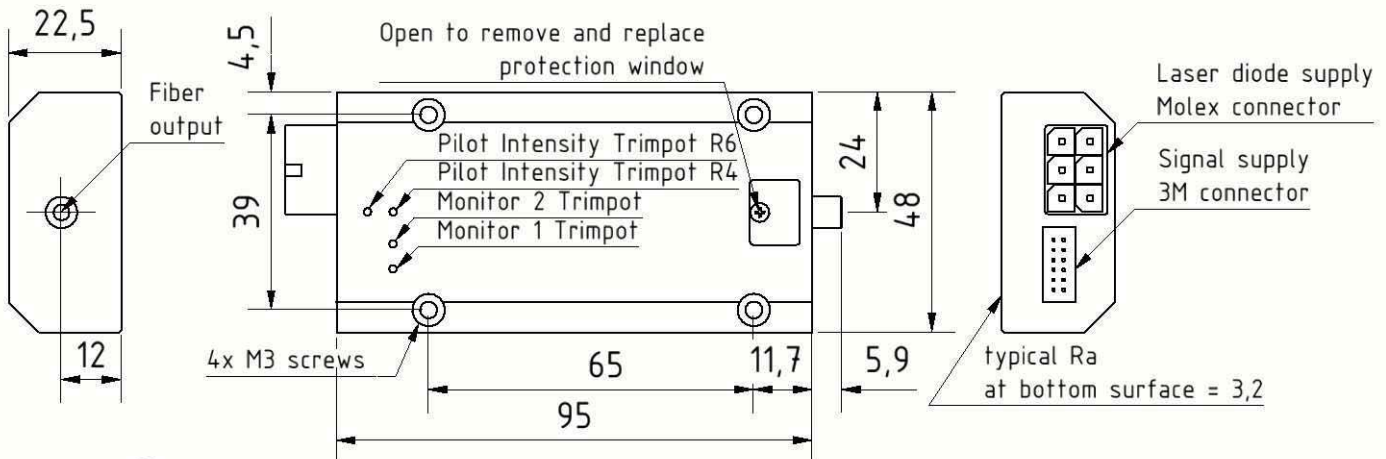

Connector - laser diode supply

MolexTM connector (Part No. 172064-0006).
Pin connection dependant on individual electro-optical configuration. Maximum current per pin is 26 A if total current to cathode exceeds 26 A two pins must be connected to cathode of driver board

Counterparts for external cable

Molex Mega-Fit Receptacle Housing Part No. 171692-0106
Molex Mega-Fit Female Crimp Terminal Part No. 76823-0322

Pin	Configuration
1	Laser diode cathode (-)
2	no connection
3	no connection
4	no connection
5	no connection
6	Laser diode anode (+)

Connector - signals

Connector on laser module Part No. (Mini revision 3 3M 159112-5012) (Mini revision 4 with locking Molex 87833-1273)

Counterpart for external cable

Molex Milli Grid Cable to Board Receptacle Part No. 87568-1273 with locking ramp.
Flat ribbon cable with pitch of 1mm and AWG28

Pin	Configuration
1	Supply +12V
2	Fiber Sensor 1 Out (0-12V) (*)
3	GND1
4	Fiber Sensor 2 Out (0-12V) (*)
5	Monitor Photo Diode 1 Out (0-4)V (*)
6	Pilot Supply (5 V red, 8 V green) (*)
7	Monitor Photo Diode 2 Out (0-4)V (*)
8	Pilot GND2
9	NTC / PT100 / LM35 Supply 5V (*)
10	Pilot intensity control In (0-5)V (*)
11	NTC / PT100 / LM35 Signal (*)
12	No connection

* optional

We manufacture diode lasers.

Electrical and Optical Characteristics (Typical laser specifications at 25° C *)

Parameter	Symbol (Conditions)	Min	Typical	Max	Unit
Optical Characteristics					
Mode 1 maximum output power (1,2,3)	P _{op-1} (c.w. and AR coated fiber or end cap)	35			W
Mode 2 maximum output power (1,2,3)	P _{op-2} (c.w. and non AR coated fiber no end cap)	24			W
Peak wavelength (at P _{op})	λ _{peak} (c.w.)	905		925	nm
Spectral width (FWHM)	λ _{FWHM}	2	4	7	nm
Spectral shift with temp.	λ _{T_Shift}		0.3		nm/K
Spectral shift with current	λ _{I_Shift}		0.4		nm/A
Electrical Characteristics					
Mode 1 forward current at maximum power	I _{op-1} (c.w. at P _{op-1})		23		A
Mode 1 absolute maximum forward current	I _{op-1} (c.w. at P _{op-1})			25	A
Mode 2 forward current at maximum power	I _{op-2} (c.w. at P _{op-2})		17		A
Mode 2 absolute maximum forward current	I _{op-2} (c.w. at P _{op-2})			18	A
Forward voltage	V _{op} (c.w.)		3.3	3.8	V
Threshold current	I _{th}		2.6		A
Conversion efficiency			45		%
Fiber					
Fiber core diameter			400		μm
Fiber centricity			+/-10		μm
Numerical Aperture	NA		0.22		

Options / General Parameter / Accessories

Parameter	Symbol	Min	Typ	Max	Unit
Pilot Beam (Option 5)					
Pilot Beam Output Power adjustable (6) red/green		0	1	3	mW
Pilot Beam Wavelength red/green			650±10 / 520±10		nm
Pilot Beam Operating Voltage red/green			4/7	5/8	V
Pilot Beam Operating Current red/green				<35/200	mA
Pilot Beam Intensity Control Voltage red/green (7)		0(max. Intensity)		5(min. Intensity)	V
Sensors (Options)					
Power Monitor Supply Voltage			12		V
Power Monitor Signal Voltage		0		4 (at max. Power)	V
Fiber Detection Sensor Supply Voltage			12		V
Fiber Detection Sensor Signal Voltage		0		12	V
Temperature Sensor		Standard NTC (10k) or optional (PT100 or LM35)			

Notes * taken at internal temperature sensor, **Laser wavelength 915nm** require an (at least at the laser module side) AR <0.7% (+10nm around peak wavelength) coated fiber facet or end cap on fiber facet module side or power reduction of 30%. Avoid direct feedback from materials like mirrors, optics, processed material etc. back into laser module via the fiber cable by more than 10%.

** we recommend to operate the laser above dew point

(1) Power is measured ex fiber according to given fiber specifications including measures and tolerances of fiber and ferrules for uncoated fiber facets (**exception see ***)

Given value is the maximum power level. For given max. power level operating current and voltage can deviate by max.10% from typical values and is lower than maximum values. Please choose your laser driver design accordingly.

(2) Do not exceed maximum forward current for rated power as given above otherwise the laser diode may be damaged

(3) Rule of thumb: Power ex fiber decreases up to 5% (<1100nm) and up to 7% (>1400nm) every 10 °C temperature increase at internal temperature sensor. Lifetime decreases by about factor of two every 10 °C.

(4) Required flatness of customer heat sink 0.05mm over 100mm.

(5) Red and green minimum pilot power ist set at factory by customer request. Standard is 1 mW.

(6) Adjust trimpot R6 when Intensity pin 10 control is left open

(7) Adjust trimpot R4 to achieve 0%-100% pilot intensity for 5V to 0V at pin 10

(8) Calculation example of thermal load and necessary thermal resistance of heat sink to maintain internal diode temperature of 25°C :

Thermal load = Output power * (1/conversion efficiency - 1)

Heat sink thermal resistance = (25 °C - ambient tempereure) / thermal load

Example: Output power: 20 W, Conversion efficiency: 0.45, Thermal resistance between bottom of module to internal tempereure sensor: 0.1 K/W, Internal temperature: 25 °C

Thermal load = 20 W * (1/0.45 - 1) = 50 W, Heat sink thermal resistance = (25 °C - 20 °C) / 50 W = 0.1 K/W

(9) VBG (Volume Bragg Grating) ensures that 95% of optical output power is within +/-0.5 nm of specified wavelength.


We manufacture diode lasers.

Fiber Connector

(1) Lumics laser diode fiber coupling technology ensures loss into the fiber cladding of <2% of the total power if the fiber centricity is below 10µm and ferrule diameter and distance of the fiber end facet to the reference plane complies with shown technical drawing. Use a fiber microscope to check for dust free fiber end facet and fiber centricity.

(2) Free standing fibers suffer from higher risk of fiber damage to the fiber tip due to mechanical stress by handling and the fiber end facet can not be polished as simple as for not free standing fibers.

(3) For more information see http://www.lumics.de/wp-content/uploads/lu_fiber_patchcords.pdf

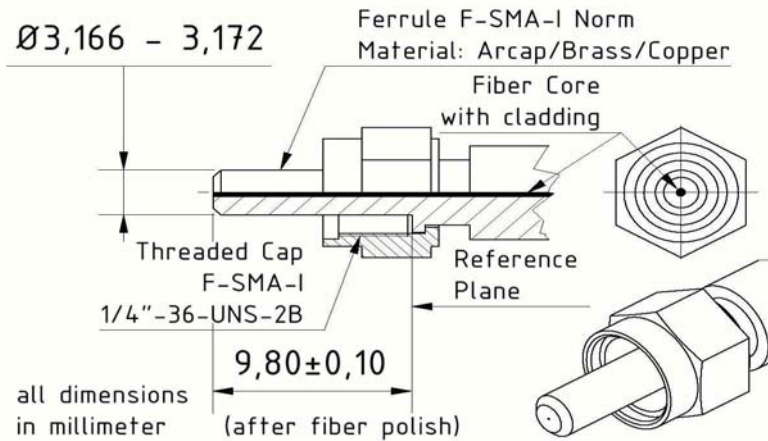

General Parameters / Accessories


Parameter	Symbol	Min	Typ	Max	Unit
Storage Temperature	T _S	-10		55	°C
Internal operating * and (Ambient) temp , c.w.-operation **	T _{op.c.w.}	10(5)		35(40)	°C
Humidity / Non-condensing Atmosphere				90	%
Thermal heat sink resistance				0.1	k/W
Maximum fiber flange temperature				50	°C
Weight			160		g
Compliance			CE, ROHS		

Further Options (Please ask for quotation if needed)

Optical fiber patchcord, Laser diode drivers for each individual wavelength, Interface cable , OEM laser diode driver and temperature controller

* taken at internal temperature sensor ** we recommend to operate the laser above dew point. Below dew point water condensation on the exit window may damage the window when laser is switched on. If the module was stored below dew point before operation dry the window by pre-heating the module to 25°C

User Safety



Important Note Read and carefully follow operating manual instructions. Especially, whenever power supply is switched on or off, always disconnect from laser module. See manual for details. Uncontrolled on / off switching may cause spikes and result in fatal device damage. This product is not certified by with IEC 60825-1 or 21CFR1040.10/ 21CFR1040.11 and and must comply with the applicable regulations by the Purchaser if sold as laser product.

We manufacture diode lasers.