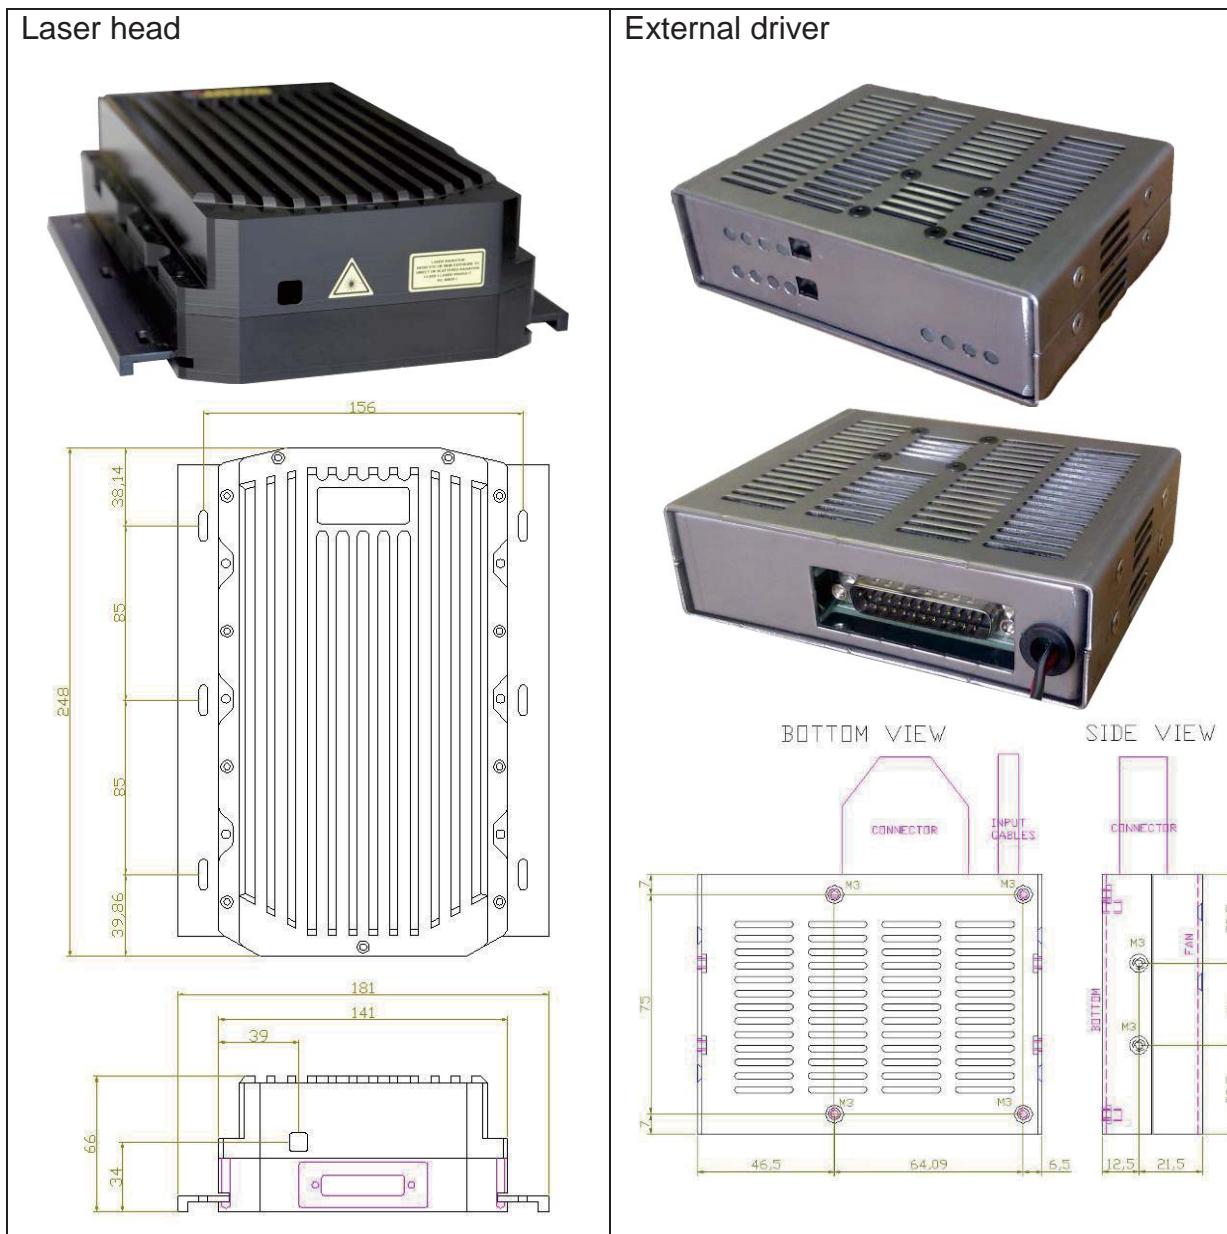


RLM-7000LX

<i>Model Nr.</i>	RLM-7000LX
<i>Optical power (mW)</i>	5.6W
<i>Center wavelength (nm)</i>	637
<i>Center wavelength tolerance (nm)</i>	± 5
<i>Beam size (FWHM, mm) (horizontal/*vertical)</i>	6 x 5
<i>Beam divergence (half angle, horizontal/vertical, mrad)</i>	0.8 / 0.8
<i>Linear polarization</i>	N
<i>M² (horizontal/vertical)</i>	11 / 10
<i>Modulation freq.(kHz)</i>	100
<i>Power consumption (W)</i>	< 200
<i>Input voltage (V)</i>	24
<i>Dimensions (LxWxH,mm)</i>	248x141x65
<i>Driver dimensions (LxWxH,mm)</i>	117x89x34


PNEUM Co., Ltd.

5-15-3 Minamikoshigaya,Koshigaya-shi,
Saitama-ken,343-0845,Japan

TEL: 81-48-985-2720

FAX: 81-48-985-2721

info@pneum.co.jp 1508

Contact: lasers@kvant.sk