

FASTLITE

Ultrafast - Shaping - Measurement - Control



DAZZLER™ HR 1030

High Resolution-cut 25mm DAZZLER™

Specifications


PROGRAMMABLE AMPLITUDE AND PHASE FILTER
FOR FEMTOSECOND LASER PULSE SHAPING

- ✓ Ultra-compact device
- ✓ In-line geometry
- ✓ Advanced software functionalities
- ✓ Simple optical alignment

• Wavelength tuning range	910 nm to 1150 nm
○ Wavelengths outside this range are poorly or not diffracted	
• Instantaneous bandwidth	up to 240 nm
• Spectral resolution	0.5 nm at 1030 nm
• Intensity control dynamic range	> 45 dB
• Maximum programmable delay	7.5 ps at 1030 nm
• Diffraction efficiency for operation up to 10 kHz	50% on a 50 nm bandwidth 25% on a 100 nm bandwidth
○ With optional 20W RF amplifier (up to 6kHz)	40% on a 100 nm bandwidth
○ With optional 50W external RF amplifier (up to 2.5kHz)	40% on a 240 nm bandwidth
• Typical acoustic waveform refreshing time	< 3ms
• Input beam requirements	30 μJ max on $\phi = 2.5$ mm, collimated
• Optical module dimensions	48 x 94 x 20 mm ³
• Typical optical jitter	< 10 fs
○ With optional Low-jitter electronics	< 100 as

✓ Special feature for Yb or Nd-doped amplifiers optimization

High dynamic pulse compression optimization
When combined with the *Wizzler* feedback loop.

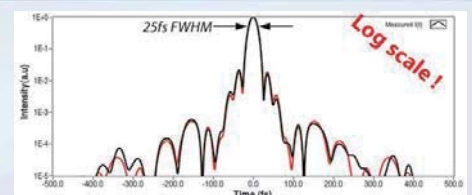

Phone: +33 (0)4 88 13 17 51

FASTLITE

Fax: +33 (0)4 92 95 76 90

www.fastlite.com

E-mail: info@fastlite.com

Spec-HR-1030-rev2016-1 9/3/2016

Les collines de Sophia, Bât D1

1900 route des crêtes 06560

VALBONNE, FRANCE

PNEUM Co., Ltd.

5-15-3 Minamikoshigaya, Koshigaya-shi,
Saitama-ken, 343-0845, Japan

TEL: 81-48-985-2720

FAX: 81-48-985-2721

info@pneum.co.jp 1607