

VORTAN LASER TECHNOLOGY, INC

STRADUS™ 705-30

The Stradus™ diode laser module is a fully integrated, plug and play, and self-contained laser module. The patented sealed optical cavity and the innovative electronics give the Stradus™ unparalleled power stability, beam pointing stability, and low noise over time and temperature. Vortran's Graphical User Interface (GUI) software allows the user to control and monitor the module remotely via USB or RS-232.


| | |
|---------------------------------------|---------------------------------------|
| Wavelength (nm) | 705 ± 10 |
| Power Output (mW) | 30 (-0%, +10%) |
| Spatial Mode | TEM ₀₀ |
| Beam Diameter (mm, 1/e ²) | ~1.3 or ~1.0 |
| Beam Divergence (mrad) | ~0.5 or ~1.0 |
| M ² (typical) | < 1.25 |
| Beam Circularity | > 90% |
| Beam Centration (mm) | < 0.5 |
| Beam Alignment (mrad) | < 5 |
| Pointing Stability (μrad/°C) | < 5 |
| Power Stability (over 24 hours) | < 0.5% |
| Polarization Orientation | Vertical ±2° |
| Polarization Extinction Ratio | >100:1 |
| RMS Noise (10Hz to 10MHz) | <0.2% |
| Digital Modulation | 200MHz |
| Digital Rise Time | < 2nsec |
| Modulation Depth | ∞ (full off) |
| Analog Modulation | 500kHz |
| Analog Rise Time | < 0.7 μs |
| Input Power (Head) | 12V DC, 1.5A (max) |
| Input Power (Control Box) | 90-250 VAC, 50/60Hz |
| Storage Temperature | -10°C to +60°C |
| Operating Temperature | +10°C to +45°C |
| Laser Head Weight | 210g |
| Communication | Mini-USB and RS-232 |
| CDRH Class | Class IIIb |
| ESD Protection | Class 4 |
| EU Compliance | CE Mark Certified with control box |
| RoHS Compliance | EU and China |

Note: Specifications guaranteed only at full power


P/N 11356 B1 Vortran Laser Technology, Inc. follows a continuous improvement process.
Specifications are subject to change. © Vortran Laser Technology, Inc. 2014



- **Medical, Biomedical & Industrial**
- **Patented Sealed Optical Cavity**
- **Self-contained & Compact**
- **Excellent Beam Quality**
- **Low Noise**
- **USB or RS-232 Interface with GUI**
- **Analog & Digital Modulation**
- **OEM Head or End-user Systems**

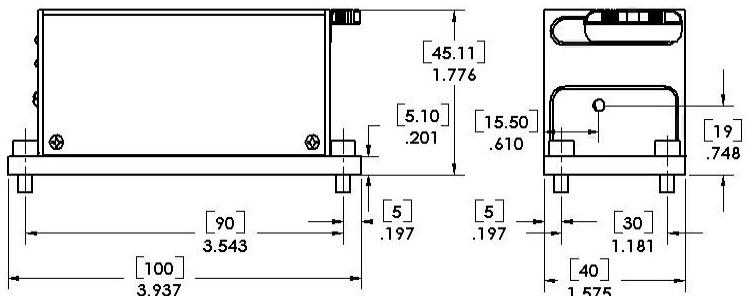

Graphical User Interface Software

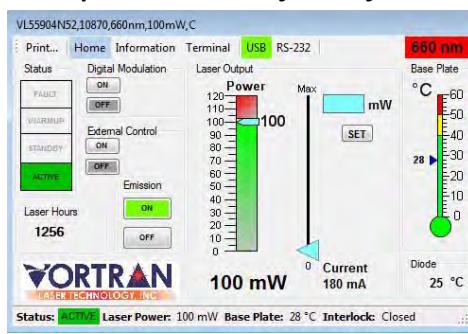

VORTAN
LASER TECHNOLOGY, INC.

www.vortanlaser.com
sales@vortanlaser.com

21 Goldenland Court #200
Sacramento, CA 95834
Phone 916.283.8208
Fax 916.648.9751



PNEUM Co., Ltd.

5-15-3 Minamikoshigaya, Koshigaya-shi,
Saitama-ken, 343-0845, Japan

TEL: 81-48-985-2720
FAX: 81-48-985-2721
info@pneum.co.jp 1409